



GT8 Medium Wheelbase

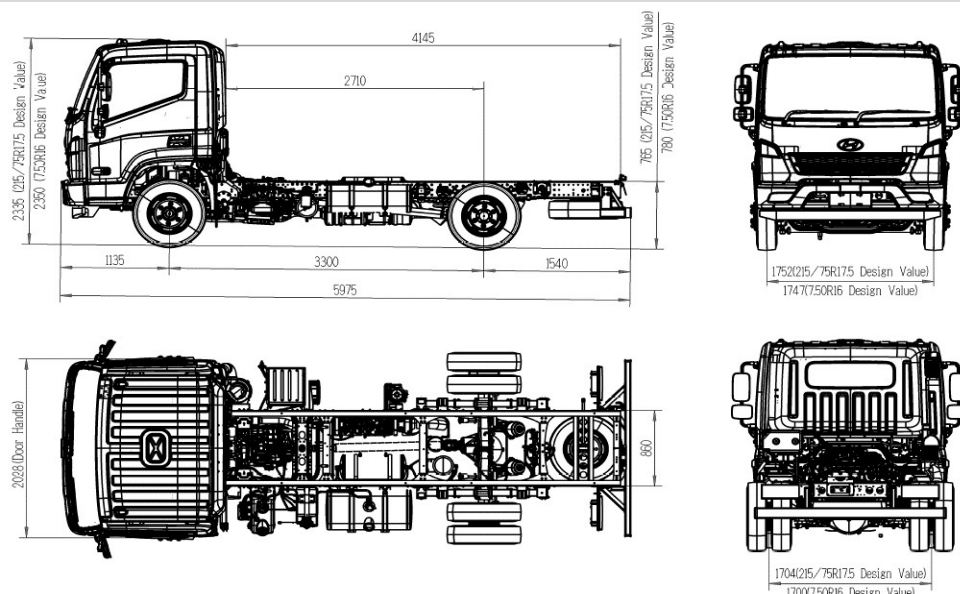

Cab	Width	Wide	
	Length	Standard	
	Height	Standard	
Wheel Base		Medium	
Drive System		4 x 2	
Application Engines		ISF3.8s3154 (Euro3) / ISF3.8s4R154 (Euro4)	
Dimensions (mm)			
Wheel Base		3,300	
Overall (Chassis Cab)	Length	5,975	
	Width	2,028 (Door Handle)	
	Height	2,335 (215 / 75R17.5) / 2,350 (7.50R16)	
Wheel Tread	Front	1,752 (215 / 75R17.5) / 1,747 (7.50R16)	
	Rear	1,704 (215 / 75R17.5) / 1,700 (7.50R16)	
Overhang	Front	1,135	
(Chassis Cab)	Rear	1,540	
C.A (Cab to rear Axle)		2,710	
C.E (Cab to End of frame)		4,145	
Min. Ground Clearance		160 (215 / 75R17.5) / 175 (7.50R16)	
Min. Turning Radius	m	6.74	
Weight (kg)			
		Euro3	Euro4
Chassis Cab Weight (AMT/MT)		3,084 / 3,044	3,111 / 3,071
	Front	1,889 / 1,869	1,910 / 1,890
	Rear	1,195 / 1,175	1,201 / 1,181
** Max Gross Vehicle Weight (AMT/MT)		7,800	
	Front	2,844 / 2,831	2,861 / 2,848
	Rear	4,956 / 4,969	4,939 / 4,952

** Max. GVW includes the front & rear axle loads based on the permissible tire load.


GT8 Medium Wheelbase (E6)

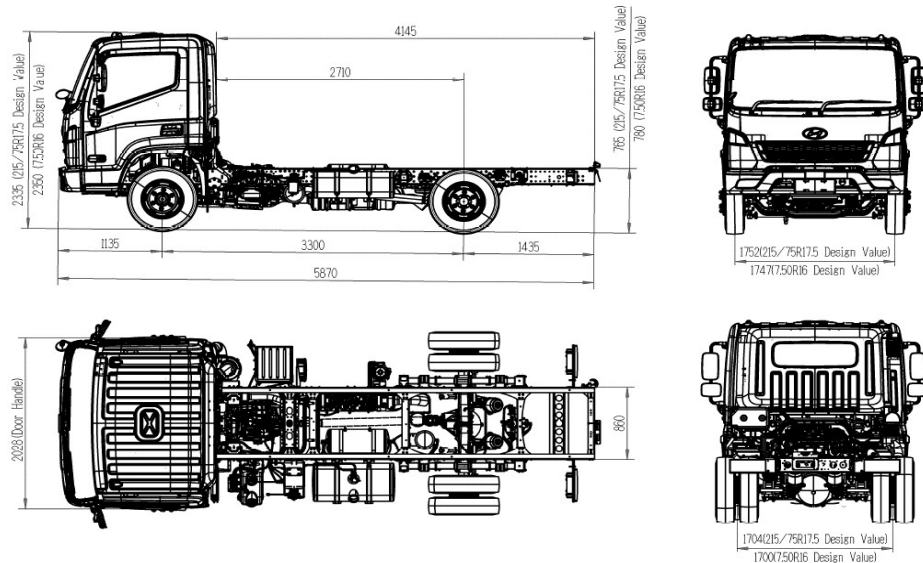

Cab	Width	Wide
	Length	Standard
	Height	Standard
Wheel Base		Medium
Drive System		4 x 2
Application Engines		F3,8EVIE156 (Euro6)
Dimensions (mm)		
Wheel Base		3,300
Overall (Chassis Cab)	Length	5,870
	Width	2,028 (Door Handle)
	Height	2,335 (215 / 75R17.5) / 2,350 (7.50R16)
Wheel Tread	Front	1,752 (215 / 75R17.5) / 1,747 (7.50R16)
	Rear	1,704 (215 / 75R17.5) / 1,700 (7.50R16)
Overhang (Chassis Cab)	Front	1,135
	Rear	1,435
C.A (Cab to rear Axle)		2,710
C.E (Cab to End of frame)		4,145
Min. Ground Clearance		160 (215 / 75R17.5) / 175 (7.50R16)
Min. Turning Radius	m	6.74
Weight (kg)		
Chassis Cab Weight (AMT/MT)		3,137 / 3,035
	Front	1,903 / 1,832
	Rear	1,234 / 1,203
** Max Gross Vehicle Weight (AMT/MT)		7,800
	Front	2,900 / 2,868
	Rear	4,900 / 4,932

** Max. GVW includes the front & rear axle loads based on the permissible tire load.


GT8 Long Wheelbase

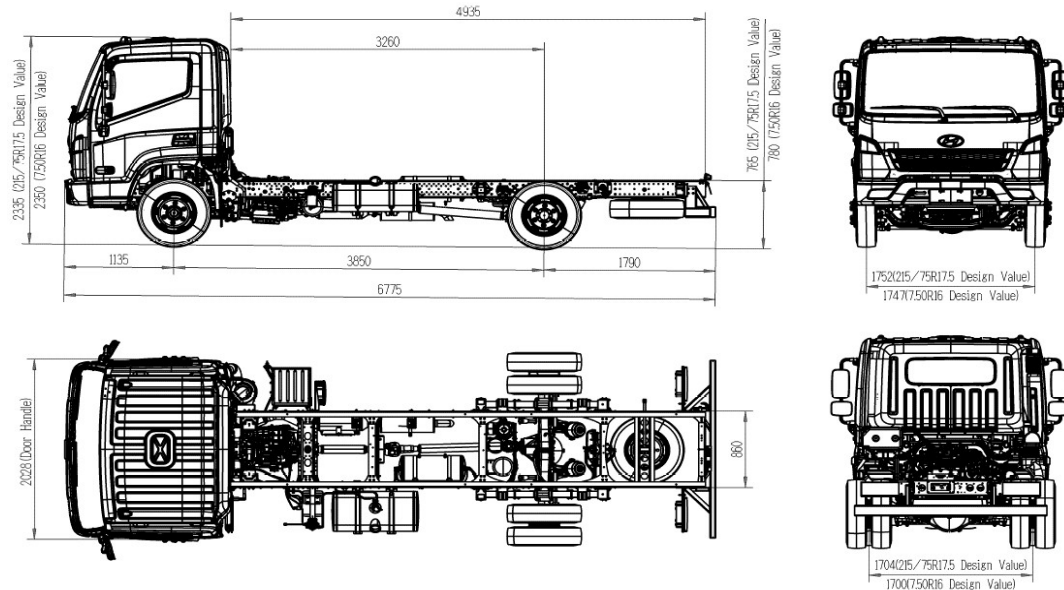

Cab	Width	Wide
	Length	Standard
	Height	Standard
Wheel Base		Long
Drive System		4 x 2
Application Engines		ISF3,8s3154 (Euro3) / ISF3,8s4R154 (Euro4)
Dimensions (mm)		
Wheel Base		3,850
Overall (Chassis Cab)	Length	6,775
	Width	2,028 (Door Handle)
	Height	2,335 (215 / 75R17.5) / 2,350 (7.50R16)
Wheel Tread	Front	1,752 (215 / 75R17.5) / 1,747 (7.50R16)
	Rear	1,704 (215 / 75R17.5) / 1,700 (7.50R16)
Overhang	Front	1,135
(Chassis Cab)	Rear	1,790
C,A (Cab to rear Axle)		3,260
C,E (Cab to End of frame)		4,935
Min. Ground Clearance		160 (215 / 75R17.5) / 175 (7.50R16)
Min. Turning Radius	m	7,84
Weight (kg)		Euro3Euro4
Chassis Cab Weight (AMT/MT)		3,120 / 3,0803,131 / 3,091
	Front	1,911 / 1,8881,917 / 1,894
	Rear	1,209 / 1,1921,214 / 1,197
** Max Gross Vehicle Weight (AMT/MT)		7,800
	Front	2,900 / 2,900
	Rear	4,900 / 4,900

** Max. GVW includes the front & rear axle loads based on the permissible tire load.


GT8 Long Wheelbase (E6)

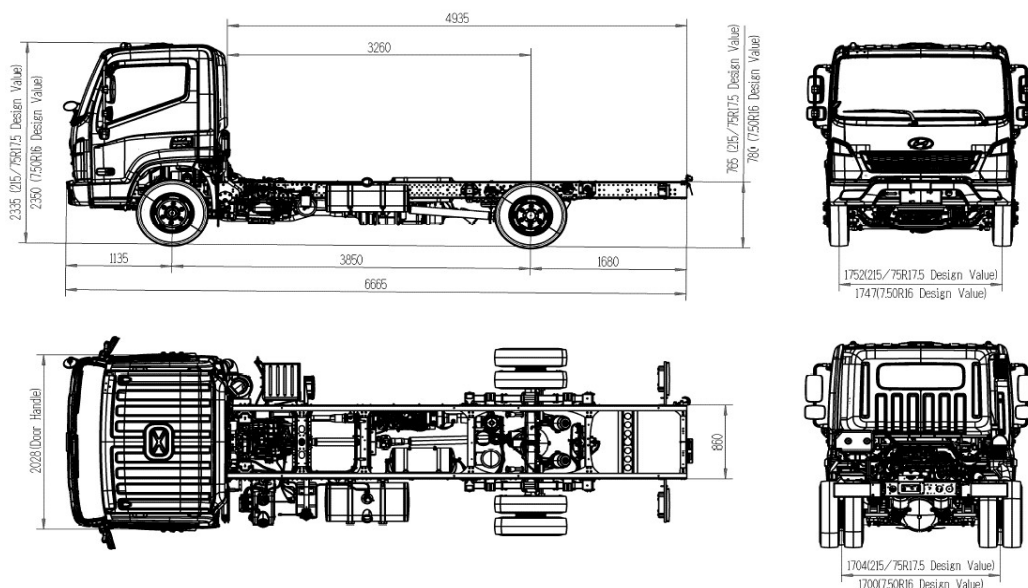

Cab	Width	Wide
	Length	Standard
	Height	Standard
Wheel Base		Long
Drive System		4 x 2
Application Engines		F3.8EVIE156 (Euro6)
Dimensions (mm)		
Wheel Base		3,850
Overall (Chassis Cab)	Length	6,665
	Width	2,028 (Door Handle)
	Height	2,335 (215 / 75R17.5) / 2,350 (7.50R16)
Wheel Tread	Front	1,752 (215 / 75R17.5) / 1,747 (7.50R16)
	Rear	1,704 (215 / 75R17.5) / 1,700 (7.50R16)
Overhang (Chassis Cab)	Front	1,135
	Rear	1,680
C.A (Cab to rear Axle)		3,260
C.E (Cab to End of frame)		4,935
Min. Ground Clearance		160 (215 / 75R17.5) / 175 (7.50R16)
Min. Turning Radius	m	7.84
Weight (kg)		
Chassis Cab Weight (AMT/MT)		3,177 / 3,076
	Front	1,947 / 1,873
	Rear	1,230 / 1,203
** Max Gross Vehicle Weight (AMT/MT)		7,800
	Front	2,900
	Rear	4,900

** Max. GVW includes the front & rear axle loads based on the permissible tire load.


GT8 Extra Long Wheelbase

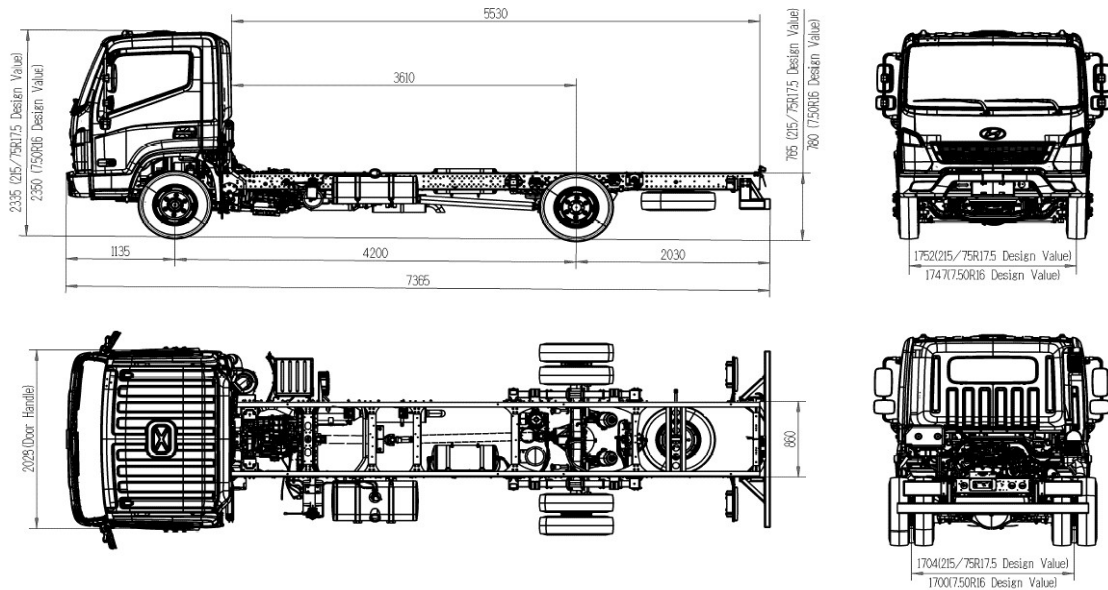

Cab	Width	Wide
	Length	Standard
	Height	Standard
Wheel Base		Extra Long
Drive System		4 x 2
Application Engines		ISF3,8s3154 (Euro3) / ISF3,8s4R154 (Euro4)
Dimensions (mm)		
Wheel Base		4,200
Overall (Chassis Cab)	Length	7,365
	Width	2,028 (Door Handle)
	Height	2,335 (215 / 75R17.5) / 2,350 (7.50R16)
Wheel Tread	Front	1,752 (215 / 75R17.5) / 1,747 (7.50R16)
	Rear	1,704 (215 / 75R17.5) / 1,700 (7.50R16)
Overhang (Chassis Cab)	Front	1,135
	Rear	2,030
C,A (Cab to rear Axle)		3,610
C,E (Cab to End of frame)		5,530
Min. Ground Clearance		160 (215 / 75R17.5) / 175 (7.50R16)
Min. Turning Radius	m	8,54
Weight (kg)		
		Euro3Euro4
Chassis Cab Weight (AMT/MT)		3,155 / 3,1153,166 / 3,125
	Front	1,925 / 1,9021,932 / 1,907
	Rear	1,230 / 1,2131,234 / 1,218
** Max Gross Vehicle Weight (AMT/MT)		7,800
		Front2,900 / 2,900
		Rear4,900 / 4,900

** Max. GVW includes the front & rear axle loads based on the permissible tire load.

GT8 Extra Long Wheelbase (E6)

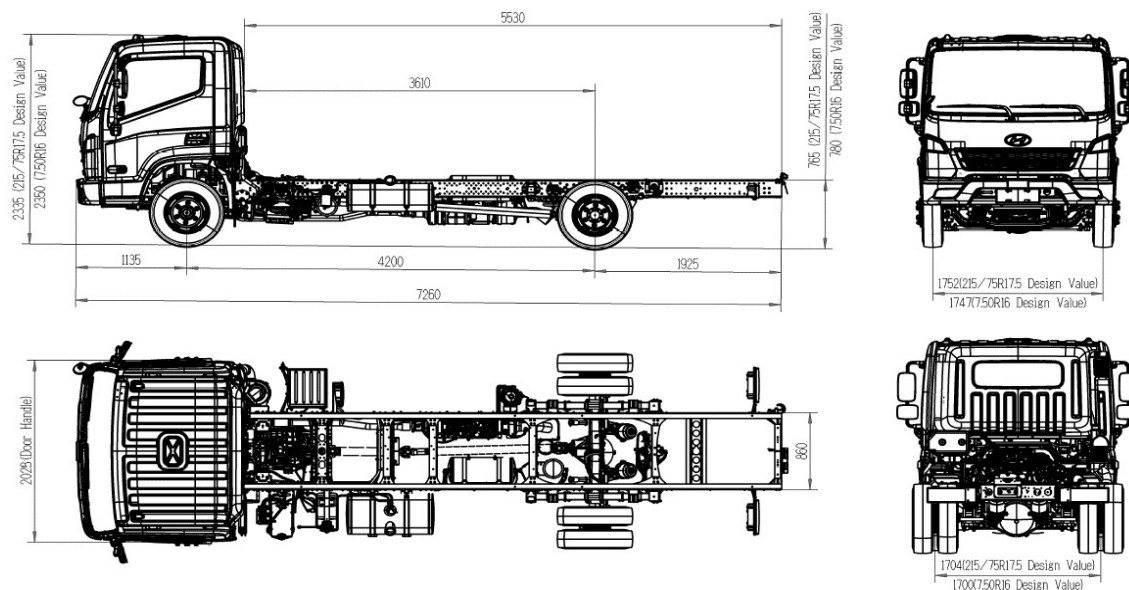

Cab	Width	Wide
	Length	Standard
	Height	Standard
Wheel Base		Extra Long
Drive System		4 x 2
Application Engines		F3.8EVIE156 (Euro6)
Dimensions (mm)		
Wheel Base		4,200
Overall (Chassis Cab)	Length	7,260
	Width	2,028 (Door Handle)
	Height	2,335 (215 / 75R17.5) / 2,350 (7.50R16)
Wheel Tread	Front	1,752 (215 / 75R17.5) / 1,747 (7.50R16)
	Rear	1,704 (215 / 75R17.5) / 1,700 (7.50R16)
Overhang (Chassis Cab)	Front	1,135
	Rear	1,925
C.A (Cab to rear Axle)		3,610
C.E (Cab to End of frame)		5,530
Min. Ground Clearance		160 (215 / 75R17.5) / 175 (7.50R16)
Min. Turning Radius	m	8.54
Weight (kg)		
Chassis Cab Weight (AMT/MT)		3,215 / 3,035
	Front	1,975 / 2,090
	Rear	1,240 / 945
** Max Gross Vehicle Weight (AMT/MT)		7,800
	Front	2,900
	Rear	4,900

** Max. GVW includes the front & rear axle loads based on the permissible tire load.